

# 150KS SERIES

100 V – 1600 V

150 A

## Features:

- Alloy diode
- High current carrying capability
- High Voltage ratings up to 1600V
- High surge current capabilities
- Stud cathode and stud anode version



PICTURE IS FOR REFERENCE ONLY

## ELECTRICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Value	Units	Conditions
Max. average forward current	$I_{F(AV)}$	150	A	$T_c = 130^\circ\text{C}$
Max. peak forward voltage drop	$V_{FM}$	1.4	V	Rated $I_{F(peak)}$
Max. peak one cycle non-repetitive surge current	$I_{FSM}$	3570	A	10msec
Max. repetitive peak forward current	$I_{FRM}$	750	A	
Max. $I^2t$ rating (non-repetitive) for 10msec	$I^2t$	64000	$\text{A}^2\text{sec}$	



## THERMAL AND MECHANICAL SPECIFICATIONS

Parameter	Symbol	Value	Units	Conditions
Max. thermal resistance junction to case	$\Theta_{J-C}$	0.25	$^\circ\text{C}/\text{W}$	
Contact thermal resistance	$\Theta_{C-H}$	0.1	$^\circ\text{C}/\text{W}$	
Operating junction temperature	$T_J$	-40 to 200	$^\circ\text{C}$	
Storage temperature	$T_{STG}$	-40 to 200	$^\circ\text{C}$	
Mounting torque		2.0 Min 3.0 Max	M-Kg	Non-lubricated threads
Approximate weight	W	150	gm	

Parameter	Symbol	10	20	40	60	80	100	120	140	160
Max. repetitive peak reverse voltage	$V_{RRM}$	100	200	400	600	800	1000	1200	1400	1600
Max. non-repetitive peak reverse voltage	$V_{RSM}$	150	300	500	700	900	1100	1300	1500	1700
Max. RMS reverse voltage	$V_{R(RMS)}$	70	140	280	420	560	700	840	980	1120
Max. DC blocking voltage	$V_R$	100	200	400	600	800	1000	1200	1400	1600
Recommended RMS working voltage		40	80	160	240	320	400	480	560	640
Max. peak reverse leakage current	$I_{RM}$	15	15	15	12	9	7	7	6	5



**CASE OUTLINE & DIMENSIONS**

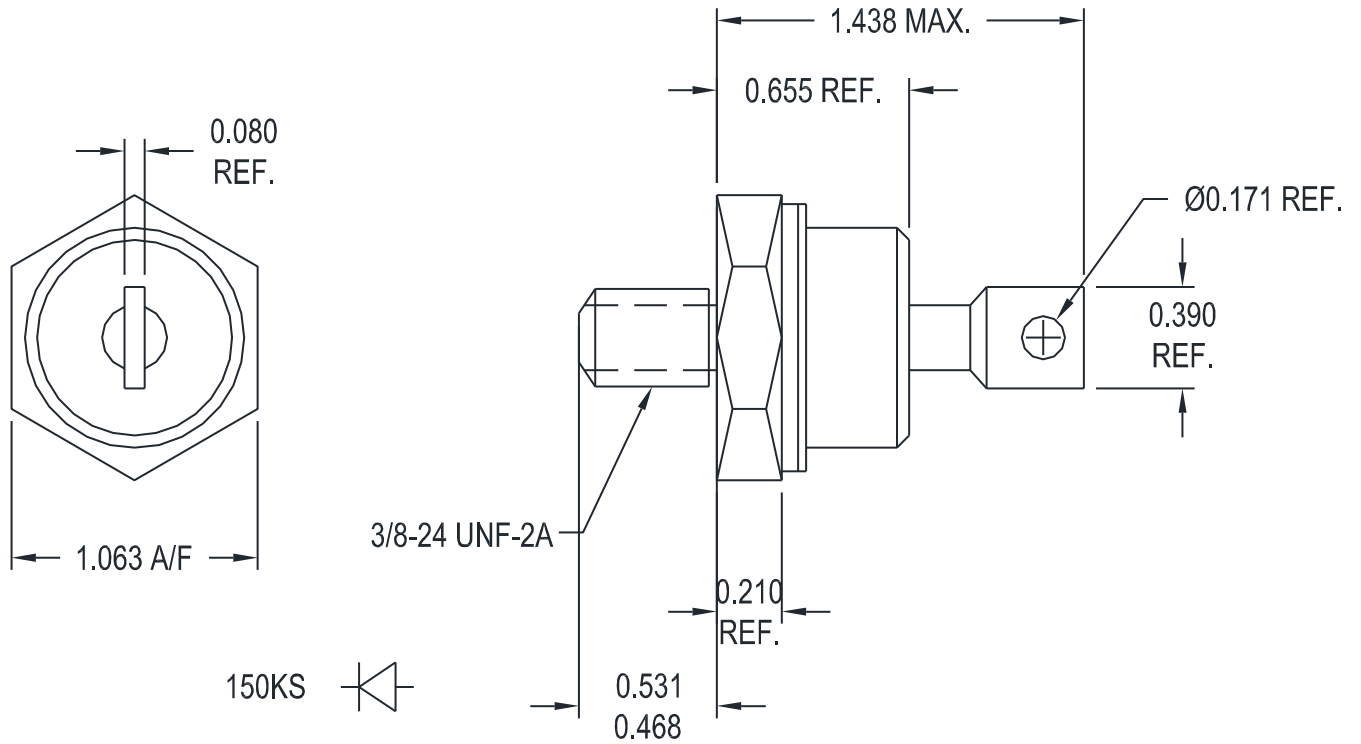

All dimensions in inches

150	KS	R	160
1	2	3	4

- 1 – 150 = Series Device
- 2 – KS = Standard Diode
- 3 – None = Normal Polarity  
R = Reverse Polarity
- 4 – Voltage Code x 10 = V<sub>RRM</sub>